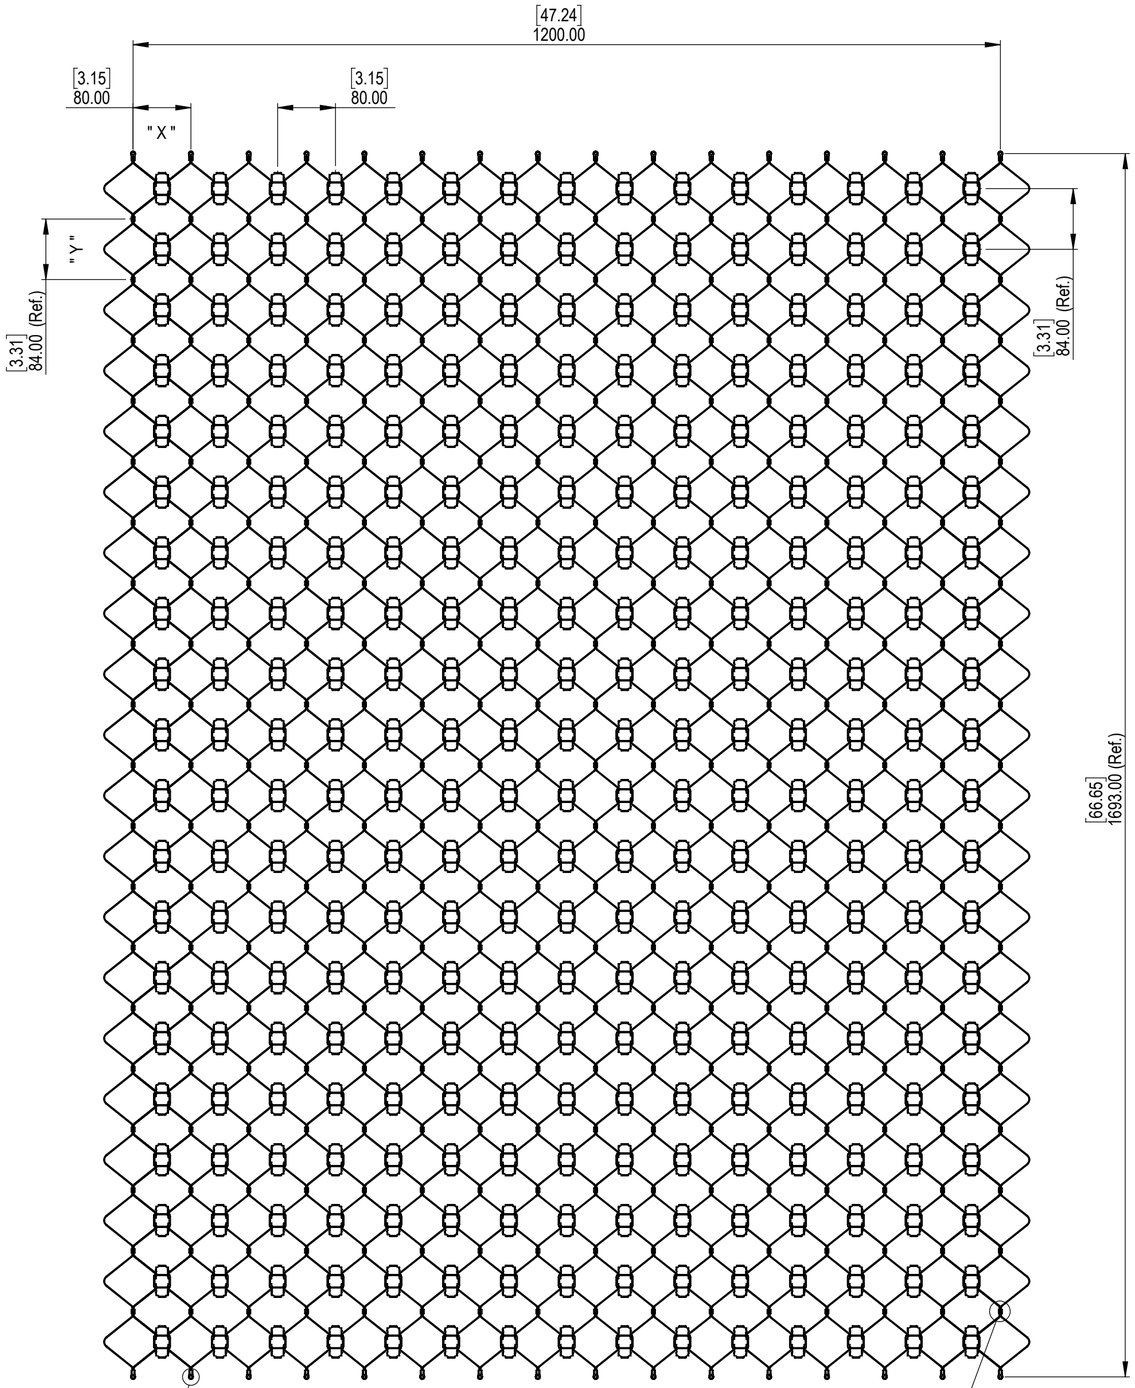

Front View



Side View

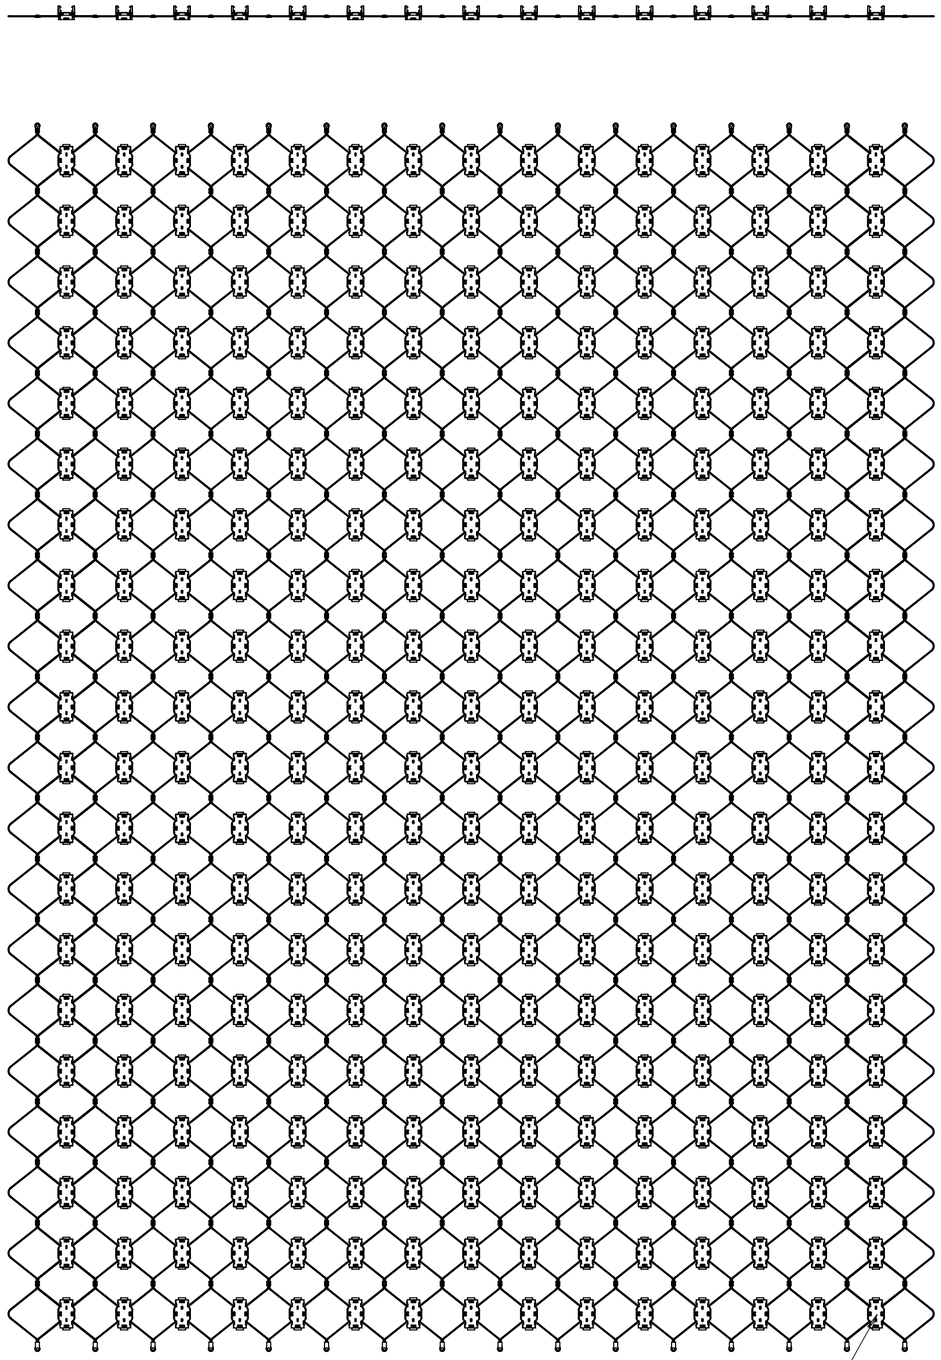

Back View



DETAIL A
SCALE 1 : 1



DETAIL B
SCALE 1 : 1

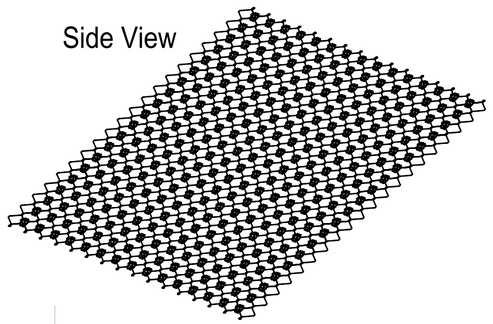

Remark :

1.) The MG frame is by others.
2.) The " X " & " Y " dimensions of grid is based on the tensioning.

NOTES:
1. MATERIAL: Dia.=1.5 mm SUS316 Stainless Steel Wire.
2. FINISH: Natrual.
3. FINISH MUST WITHSTAND 200HR (FOR OUTDOOR APPLICATION) OR 1000HR (FOR COASTAL ENVIRONMENT APPLICATION) OF ASTM B117 SALT SPRAY TEST
4. MATERIAL MUST COMPLY WITH RoHS AND REACh REQ.
5. NOT ALLOW BURRS, FLASH, DIRT, SINK MARK, SCRAP MARK, ABRASIVE AND ANY IMPERFECTION ON THE PARTS SURFACE
6. DETAILS DIMENSION REFER TO 3D FILE
7. ( ) CONTROL DIMENSIONS

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	QTY REQD

PARTS LIST

THIS DOCUMENT CONTAIN INFORMATION PROPRIETARY TO TRAXON TECHNOLOGIES LTD. USE OR DISCLOSURE WITHOUT WRITTEN PERMISSION BY TRAXON IS EXPRESSLY FORBIDDEN.

Our Brand traxon OSRAM

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM AND TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
Refer to ISO 2768-m

APPROVALS | DATE
DRAWN
CHECKED
RESP ENG
MFG ENG
QUAL ENG

MODEL: AL Dot XS

PART DESCRIPTION: Stainless Steel Mesh Grid_MG-60

MATERIAL: See Notes
FINISH: See Notes

NEXT ASSY | USED ON
APPLICATION
3RD ANGLE PROJECTION

SIZE A2 | DWG. NO. | REV. A
SCALE 1 : 6 | CAD FILE: | SHEET 1 OF 1

CONFIDENTIAL